


SPECIFICATIONS

PVC Corner angles is a rigid plastic profile molding extruded from virgin PVC on the latest state of the art equipment. It is a maintenance free, resist abrasion and will not rot, rust, peel, corrode or crack. May be used where USDA, FDA, and Agriculture Canada acceptance is required.

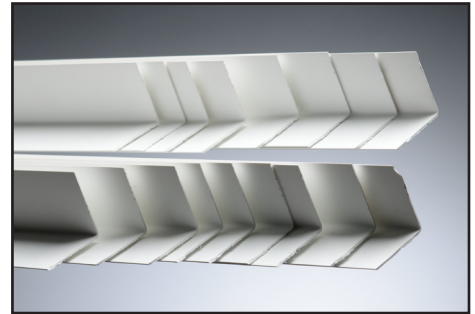

Technical Data:		ASTM#	Value/Units*
Color:	White		
Physical dimensions:	1½" x 1½" x 8'		
UV Rated :	No		
Thickness:	.040		
Hardness, Rockwell R		D-785	112
Izod Impact		D-256	18 FT-Lbs/In
Flexural Strength		D-790	11,200 PSI
Flexural Modulus		D-790	380,000 PSI
Tensile Yield		D-638	6,200 PSI
Tensile Modulus		D-638	380,000 PSI
Tensile Impact		D-1822	72 FT-Lbs/In
Flame Spread Index		E-84	15
Spoke Developed Value		E-84	205
Flammability		D-635	SE

*These are typical values and are not to be construed as specific product limits.

For more information on GLT Products, please call toll-free at 800.874.1748 or online at www.gltproducts.com.



Innovative Insulation Systems

HEADQUARTERS:

6810 Cochran Road | Solon, OH 44139 | 440.914.1122 | 440.914.1133 Fax | 1.800.874.1748

DISTRIBUTION CENTERS:

Ohio: 6810 Cochran Road | Solon, OH 44139 | 440.914.1122

North Carolina: 501 West Camel Street | Greensboro, NC 27401 | 1.800.551.9760

California: 4283 Pock Lane #200 | Stockton, CA 95206 | 1.800.833.4500

Texas: 8905 Market Street | Houston, TX 77029 | 1.800.874.1748