


TECHNICAL INFO

Lagging tapes and fabrics are made from electrical grade fiberglass normally called e-glass, and are manufactured of 100% fiberglass yarn to ensure flame retardancy, insulating protection and durability.

Lagging tape style 7628 is also resistant to high temperatures and is easy to handle, cut and sew. This tape meets government specs, MIL-C20079D, Type II, class 1

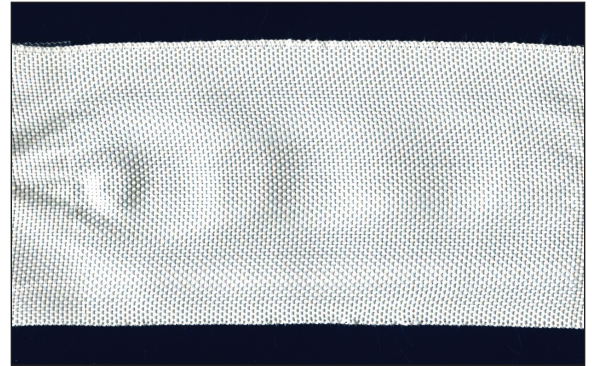

Specifications

Thickness: .007" ± .001"

Warp Ends/Inch: 42 ± 1

Warp Yarn: G 75 1/0 Fiberglass

Filling Yarn: G 150 1/0 Fiberglass

Breaking Strength: Lbs – 175 untreated

Weight: Oz./sq. yd. 5.8

Annealing Point: 657°C

Softening Point: 846°C

Continuous Operating Temperature: 315°C

% strength retention @343C: 75%

% strength retention @538C: 50%

All statements herein are expressions of opinion which we believe to be accurate and reliable but are not intended as recommendations for their use in the infringement of any patent. No patent warranty of any kind, expressed or implied is made or intended.

For more information on GLT Products, please call toll-free at 800.874.1748 or online at www.gltproducts.com.



Innovative Insulation Systems

HEADQUARTERS:

6810 Cochran Road | Solon OH 44139 | 440.914.1122 | 440.914.1133 Fax | **1.800.874.1748**

DISTRIBUTION CENTERS:

Ohio: 6810 Cochran Road | Solon OH 44139 | 440.914.1122

North Carolina: 501 West Camel Street | Greensboro, NC 27401 | 1.800.551.9760

California: 4283 Pock Lane #200 | Stockton, CA 95206 | 1.800.833.4500

Texas: 8905 Market Street | Houston, TX 77029 | 1.800.874.1748